


BALL VALVES INTEC

K640/2, DN15 - DN100, PN16/40
without vent bore

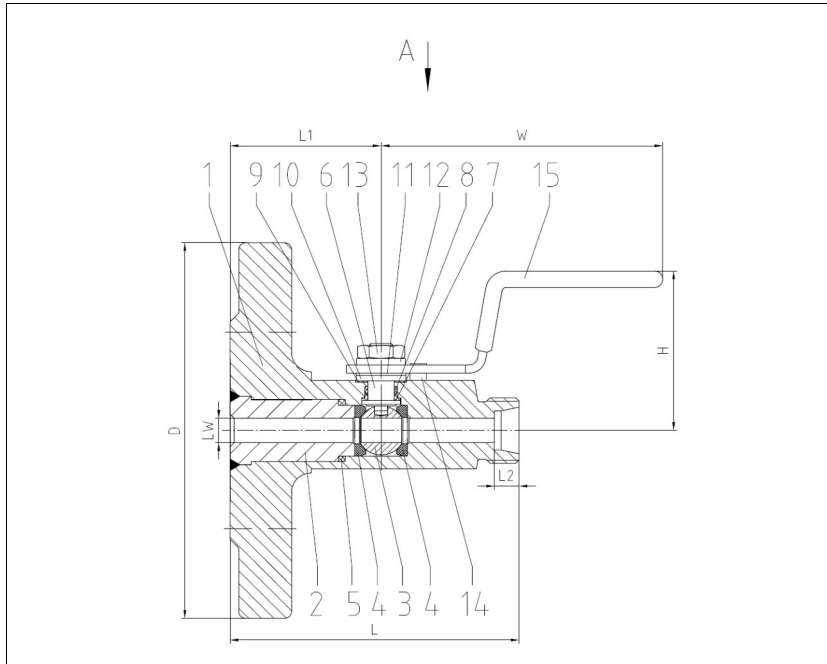

No.	Part	Material
1	body	1.4408/1.4571/1.4404
2	cap	1.4571/1.4404
3	ball	1.4571/1.4404
4	seat	KFGN
5	seal	KF
6	stem	1.4571/1.4404
7	friction washer	KFSM
8	cone ring	KF
9	antistatic element	KFA
10	washer	A2
11	plate spring	1.4310
12	serrated lock washer	A2
13	hex. nut	A2
14	stopper	1.4571/1.4404
15	lever	1.4301/plasticised-PVC

Dimensions

DN mm	LW	PN	dimensions (mm)					
			L	L1	L2	H	W	D
15	7.5	40	85	45	7.5	49	86	95
20	7.5	40	85	45	7.5	49	86	105
25	7.5	40	85	45	7.5	49	86	115
32	7.5	40	85	45	7.5	49	86	140
40	7.5	40	85	45	7.5	49	86	150
50	7.5	40	85	45	7.5	49	86	165
65	7.5	40	85	45	7.5	49	86	185
80	7.5	40	85	45	7.5	49	86	200
100	7.5	16	85	45	7.5	49	86	220
100	7.5	40	85	45	7.5	49	86	235

Other pressure classes on request


Pressure gauge ball valve with
flange connection acc. to EN 1092
pipe screwing light/heavy series acc. to DIN
2353 10-S and 12-S face to face dimensions
acc. to producers standard

Specification:


Pressure gauge ball valve with flange connection
acc. to EN 1092, pipe screwing light/heavy series
acc. to DIN 2353 10-S and 12-S, fully welded
body material stainless steel
(1.4408/1.4571/1.4404), antistatic device, free of
non ferrous metals, maintenance free shaft
sealing with friction washer and cone ring, without
vent bore, certified acc. to GERMAN clean air act
VDI 2440, with lever.

Marking: INTEC

Type: K640/2

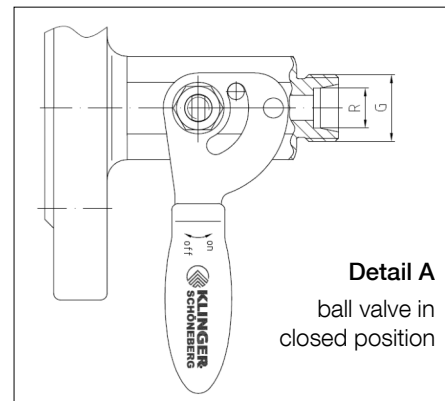

DN (mm)	R	G
all DN	10-S	M18x1.5
all DN	12-S	M20x1.5

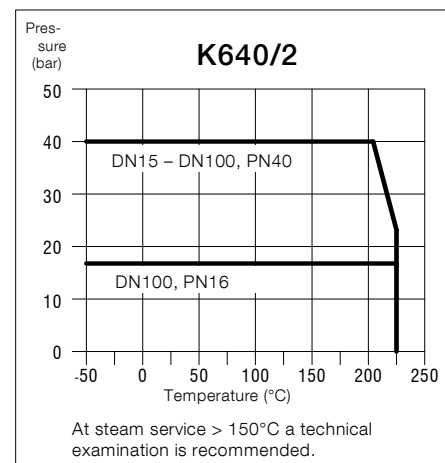

Ordering example:

INTEC K640/2, DN25, PN40, 1.4408, 10-S, M18x1,5

