

BALL VALVE

Split Body Direct Mount Flange End Ball Valve -
 Gland Design CLASS 150, DN15~DN200

MODEL: KHD-2D

» **Body Material**

ASTM CF8M, CF8, WCB

» **Size Range**

1/2" - 8" (DN15~DN200)

» **Pressure Rating**

Class150, 150PSI Saturated steam

» **End Connection**

Flanged RF


» **Standards**

Flange acc. to ASME B16.5

Face-to-face acc. to ASME B16.10




» **Temperature Range**

-4°F to 350°F (-20°C to 180°C) with PTFE seats

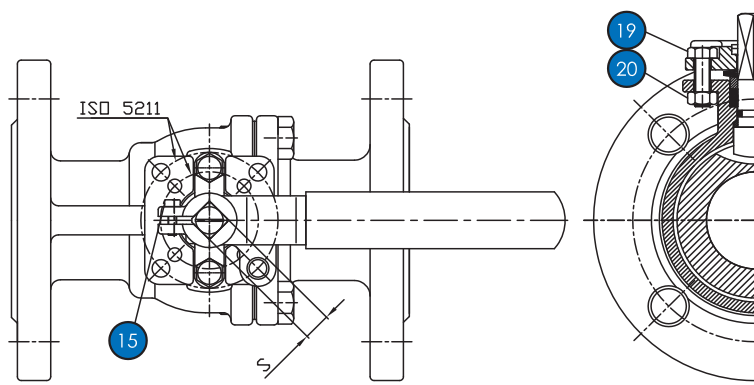

Materials List:

NO	PART NAME	MATERIAL
1	BODY	CF8M / CF8 / WCB
2	CAP	CF8M / CF8 / WCB
3	BALL	CF8M / CF8
4	BALL SEAT	PTFE
5	BODY SEAL	PTFE
6	THRUST WASHER	TFM 4215
7	STEM	SS304 / SS316
8	O-RING	VITON
9	STEM PACKING	PTFE
10	GLAND	SS304
11	GLAND FALNGE	CF8
12	BELLEVILLE WASHER	SS301
13	STOPPER	SS304
14	SNAP RING	SS304
15	HANDLE BOLT	SS304
16	HANDLE	SS304
17	HANDLE SLEEVE	PLASTIC
18	BODY BOLT	SS304 / CARBON STEEL
19	GLAND BOLT	SS304 / CARBON STEEL
20	GLAND NUT	SS304 / CARBON STEEL

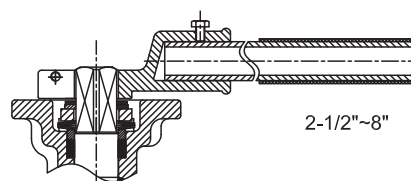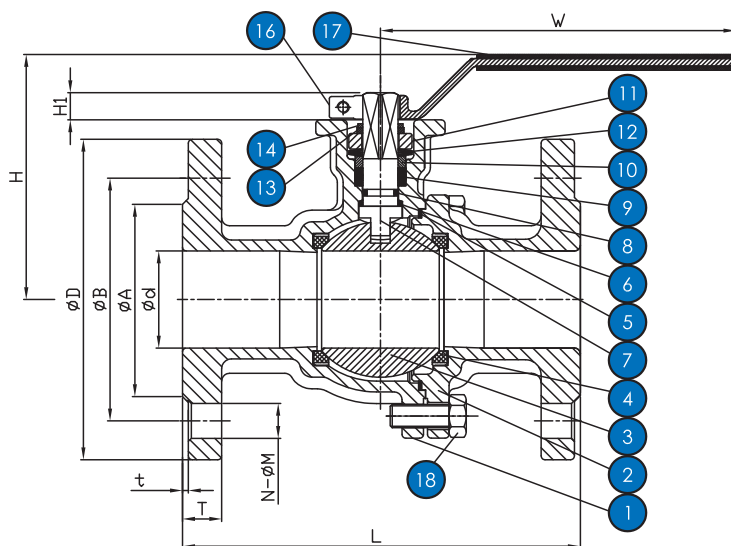

Anti-static device
 (Optional)

Dimensions (mm):

SIZE		d	L	H	W	D	B	A	T	t	S	H1	N	M	ISO 5211	Torque N.m
IN	DN															
1/2"	15	15	108	84	123	89	60.5	35	11.1	1.6	9	9	4	16	F03/F04	14
3/4"	20	20	117	94	123	98	70	43	11.1	1.6	9	9	4	16	F03/F04	18
1"	25	25	127	101	153	108	79.5	51	11.1	1.6	11	11	4	16	F04/F05	22
1 1/4"	32	32	140	108	153	117	89.5	64	12.7	1.6	11	11	4	16	F04/F05	25
1 1/2"	40	40	165	121	183	127	98.5	73	14.3	1.6	14	14	4	16	F05/F07	29
2"	50	50	178	127	183	152	120.5	92	15.9	1.6	14	14	4	19	F05/F07	34
2 1/2"	65	65	190	154	352	178	139.5	105	17.5	1.6	17	17	4	19	F07/F10	50
3"	80	80	203	165	352	190	152.5	127	19.1	1.6	17	17	4	19	F07/F10	75
4"	100	100	229	183	397	229	190.5	157	23.9	1.6	22	22	8	19	F10/F12	100
5"	125	125	356	229	708	254	216	186	23.9	1.6	27	27	8	22	F10/F12	170
6"	150	150	394	248	708	279	241.5	216	25.4	1.6	27	27	8	22	F10/F12	270
8"	200	200	457	304	920	343	298.5	270	28.6	1.6	36	36	8	22	F14	600

Note: Torque measured at ambient temperature with no loading;safety factor is not included.Select size(s) may be under development, please consult with us for details.

BALL VALVE

Split Body Direct Mount Flange End Ball Valve - Gland Design
PN40, DN15~DN200



MODEL: KHD-2D

» Body Material

DIN 1.4408, 1.4308, 1.0619

» Size Range

1/2" - 8" (DN15~DN200)

» Pressure Rating

PN40, 150PSI Saturated steam

» End Connection

Flanged RF


» Standards

Flange acc. to DIN 2635 PN40

Face-to-face acc. to DIN3202 -F4/F5




» Temperature Range

-4°F to 350°F (-20°C to 180°C) with PTFE seats

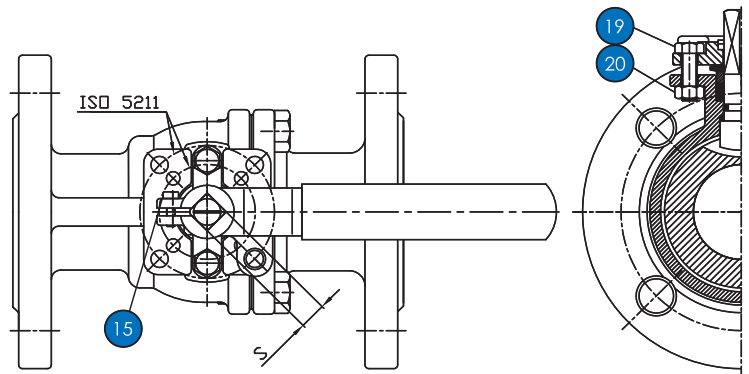

Materials List:

NO	PART NAME	MATERIAL
1	BODY	1.4408 / 1.4308 / 1.0619
2	CAP	1.4408 / 1.4308 / 1.0619
3	BALL	1.4408 / 1.4308
4	BALL SEAT	PTFE
5	BODY SEAL	PTFE
6	THRUST WASHER	TFM 4215
7	STEM	SS304 / SS316
8	O-RING	VITON
9	STEM PACKING	PTFE
10	GLAND	SS304
11	GLAND FALNGE	CF8
12	BELLEVILLE WASHER	SS301
13	STOPPER	SS304
14	SNAP RING	SS304
15	HANDLE BOLT	SS304
16	HANDLE	SS304
17	HANDLE SLEEVE	PLASTIC
18	BODY BOLT	SS304 / CARBON STEEL
19	GLAND BOLT	SS304 / CARBON STEEL
20	GLAND NUT	SS304 / CARBON STEEL

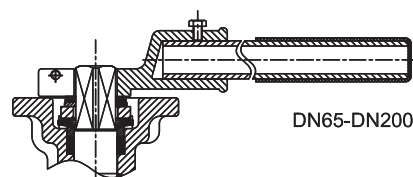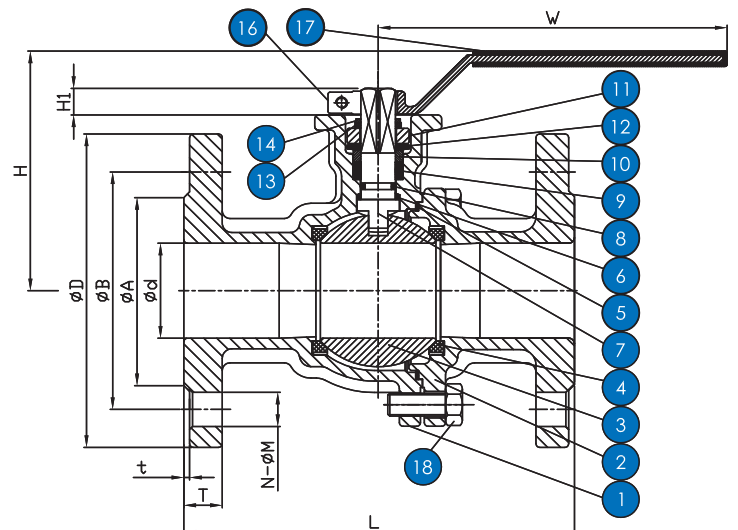

Anti-static device
(Optional)

Dimensions (mm):

SIZE		d	L	H	W	D	B	A	T	t	S	H1	N	M	ISO 5211	Torque N.m
IN	DN															
1/2"	15	15	115	84	123	95	65	45	16	2	9	9	4	14	F03/F04	18
3/4"	20	20	120	94	123	105	75	58	18	2	9	9	4	14	F03/F04	22
1"	25	25	125	101	153	115	85	68	18	2	11	11	4	14	F04/F05	26
1 1/4"	32	32	130	108	153	140	100	78	18	2	11	11	4	18	F04/F05	32
1 1/2"	40	40	140	121	183	150	110	88	18	3	14	14	4	18	F05/F07	38
2"	50	50	150	127	183	165	125	102	20	3	14	14	4	18	F05/F07	47
2 1/2"	65	65	170	154	352	185	145	122	22	3	17	17	8	18	F07/F10	58
3"	80	80	180	165	352	200	160	138	24	3	17	17	8	18	F07/F10	100
4"	100	100	190	183	397	235	190	162	24	3	22	22	8	22	F10/F12	150
5"	125	125	325	229	708	270	220	188	26	3	27	27	8	26	F10/F12	200
6"	150	150	350	248	708	300	250	218	28	3	27	27	8	26	F10/F12	320
8"	200	200	400	304	920	375	320	285	34	3	36	36	12	30	F14	600

Note: Torque measured at ambient temperature with no loading; safety factor is not included. Select size(s) may be under development, please consult with us for details.

