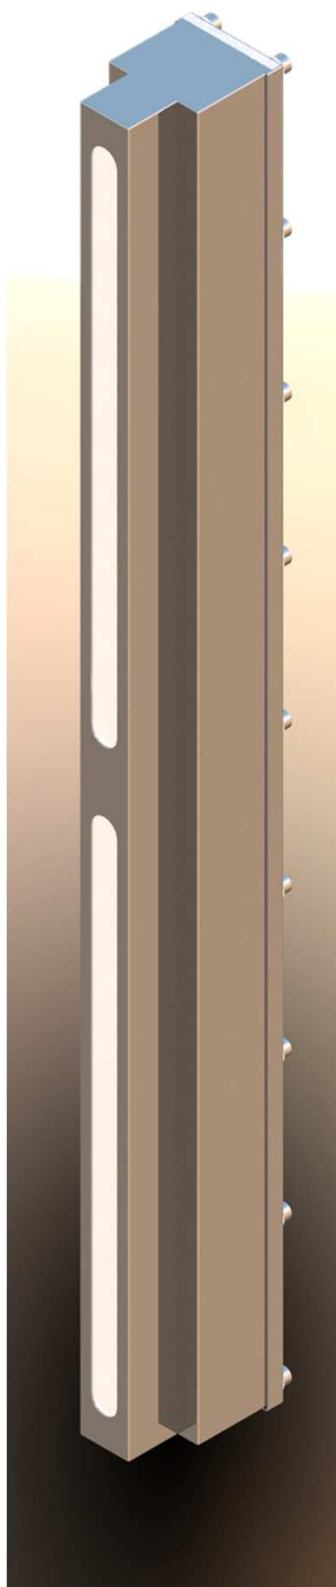


Illuminatore Led

Led Illuminator

LED


L'illuminatore LED Klinger offre un nuovo design più compatto e fornisce una luminosa più potente e omogenea con un minore consumo energetico.

The Klinger LED illuminator is a new device for the backlight service. This illuminator is brighter more than a traditional device with a lower energy consumption and compact design.

Materiale	Material
AISI 316	AISI 316
Pressacavo M20X1.5	Cable Gland M20X1.5

Caratteristiche	Features
Protezione IP 66	Protection IP66
Resistenza umidità 100%	Resistance to humidity 100%
Temperatura 46°	Temperature 46°

Valori in uscita/Output

Trasformatore interno/ Transformer volt	LPH 12v	LPH 24v
Corrente Nominale Nominal Power	1,5 A	0,75 A
Potenza Nominale Power Consumption	18W	18W

Valori in ingresso/Input

Campo di utilizzo/ Voltage	180 – 264 VAC 254 – 370 VDC
Campo di frequenza/ Frequency	47 – 63 Hz





www.klinger.in

KLINGER Industrial Products India Pvt. Ltd.
 #6 Tarana, 1st Floor, GoodEarth Malhar, Kambipura, Kengeri, Bengaluru 560074, Karnataka, India.



Tel +91 8618523021 / +91 80 2990 9572
 e-mail: info@klinger.in

Caratteristiche e dimensioni possono essere soggette a modifiche senza preavviso

Design and dimensions could be subject to modification without notice

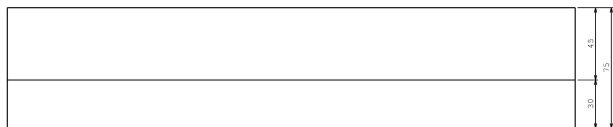

ONLY MULTIPLE SECTION
SOLO PER SEZ. MULTIPLE

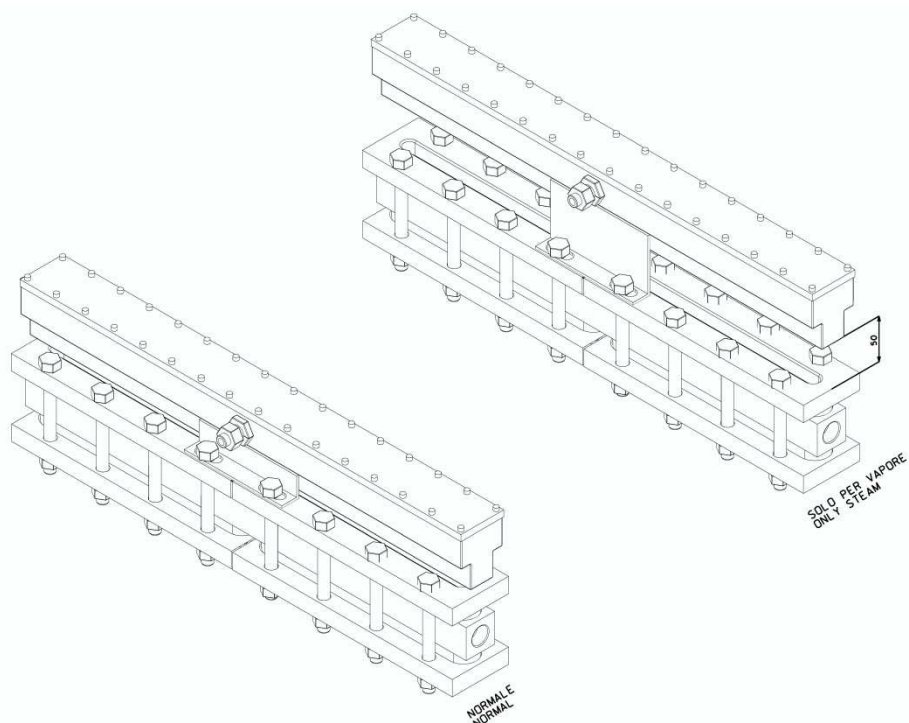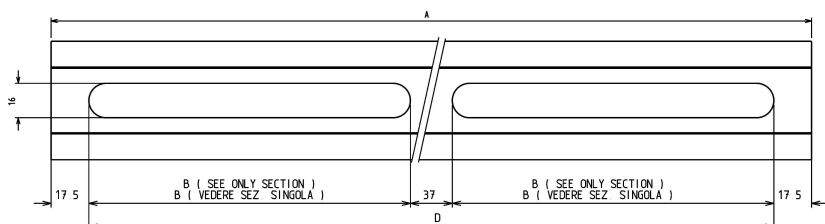

Tipo	Lungh. Corpo	Visibilità singola	Visibilità multipla.
Size	Body length	Single visibility	Multiple visibility
	A	B	D
I	128	93	/
II	153	118	/
III	178	143	/
IV	203	168	/
V	233	198	/
VI	263	228	/
VII	293	258	/
VIII	333	298	/
IX	353	318	/
2 X IV	408	/	373
2X V	468	/	433
2 X VI	528	/	493
2 X VII	588	/	553
2 X VIII	668	/	633
2 X IX	708	/	673
3 X VI	793	/	758
3 X VII	883	/	848
3 X VIII	1003	/	968
3 X IX	1063	/	1028
4 X VII	1178	/	1143
4 X VIII	1338	/	1303

IMPORTANTE: LA MASSIMA TEMPERATURA OPERATIVA DI UTILIZZO DELL'ILLUMINATORE A LED E' di 46°C

IMPORTANT: THE LED ILLUMINATOR IS SUITABLE FOR MAX OPERATIVE TEMPERATURE UP TO 46°C.

IT'S VERY IMPORTANT TO INSTALL AND / OR TO USE THIS DEVICE WITHOUT EXCEEDING THIS VALUE IN ORDER TO AVOID TO DAMAGE THE ILLUMINATOR



www.klinger.in

KLINGER Industrial Products India Pvt. Ltd.
#6 Tarana, 1st Floor, GoodEarth Malhar, Kambipura, Kengeri, Bengaluru 560074, Karnataka, India.

Tel +91 8618523021 / +91 80 2990 9572
e-mail: info@klinger.in