



### KLINGERSIL® C-4401

Sealing material for general applications with moderate temperatures and pressures. Good performance in oil, water, salt solutions, fuels, alcohols, solvent lubricants and hydrocarbons in general.

**Material** Sealing material with aramid fiber and NBR rubber.

**Color** Green / Green

**Sizes** 2000x1500mm | 4000x1500mm


**Thicknesses** 0,4 mm - 6,4mm



### Technical Data - Typical values \* thickness for 1.5mm

<b>Compressibility ASTM F 36 A</b>		%	12
<b>Recovery ASTM F 36 A</b>		%	45
<b>Heat loss DIN 52911</b>		%	26
<b>Stress relaxation BS 7531</b>	40Mpa / 300°C	Mpa	22
<b>KLINGER hot compression 50 Mpa</b>	Thickness decrease at 23°C	%	14
	Thickness decrease at 300°C	%	20
<b>Sealability DIN 3535/4</b>		ml / min.	1,0
<b>Thickness increase after fluid (ASTM F 146)</b>	Oil ASTM N° 3: 5h a 150°C	%	5
	Fuel B: 5h a 23°C	%	7
<b>Weight increase after fluid (ASTM F 146)</b>	Oil ASTM N° 3: 5h a 150°C	%	14
	Fuel B: 5h a 23°C	%	14
<b>Density</b>		g/cm3	1,70

\* Reference numbers between allowed value ranges. For information on the value ranges, contact us.

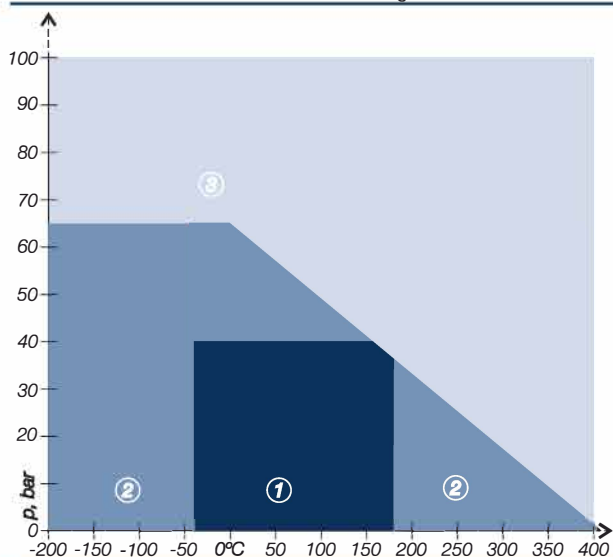

### Pressure and Temperature Chart

- ① If the temperature and pressure of your application are in this area, technical assessment is not necessary.
- ② If the temperature and pressure of your application are in this area, a technical assessment is recommended.
- ③ If the temperature and pressure of your application are in this area, a rigorous technical assessment must be carried out.

Subject to technical alterations.

KLINGER Industrial Products India Pvt. Ltd. #6 Tarana, 1st Floor, GoodEarth Malhar, Kambipura, Kengeri, Bengaluru 560074, Karnataka, India. Tel +91 8618523021 / +91 80 2990 9572 / e-mail: info@klinger.in

[www.klinger.in](http://www.klinger.in)



Quality Management System certified according to ISO 9001: 2015