




## General application gasket material

KLINGERSIL® C-4201 is a general application gasket material that offers excellent resistance to oils and solvents and is an excellent choice for OEM applications.

This compressed fiber gasket material is manufactured with a combination of synthetic fibers reinforced with a nitrile binder.

Applications: oil, solvent, water, low temperature steam and other chemical products in general.

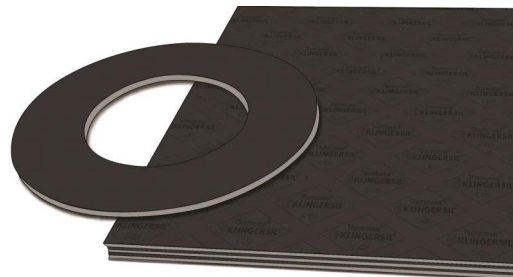

### TYPICAL VALUES REFER TO 1/16" THICK MATERIAL UNLESS NOTED

Creep relaxation <b>ASTM F38B</b> (1/32")	20 %
Sealability <b>ASTM F37A</b> (1/32")	< 0.5 ml/hr
Gas Permeability <b>DIN 3535/6</b>	< 0.5 ml/min
Compressibility <b>ASTM F36J</b>	7 - 17 %
Recovery <b>ASTM F36J</b>	50 %
<b>KLINGER Hot Compression Test</b>	
Thickness Decrease 73°F (23°C)	16 % initial
Thickness Decrease 572°F (300°C)	20.5 % additional
Weight Increase <b>ASTM F146</b> after immersion in Fuel B, 5h/73°F (23°C)	10 % maximum
Thickness Increase <b>ASTM F146</b> after immersion in	
ASTM Oil IRM 901, 5h/300°F (149°C)	0 - 5 %
ASTM Oil IRM 903, 5h/300°F (149°C)	0 - 5 %
ASTM Fuel A, 5h/73°F (23°C)	0 - 5 %
ASTM Fuel B, 5h/73°F (23°C)	0 - 5 %
Dielectric Strength <b>ASTM D149-95a</b>	14 kV/mm
Density <b>ASTM F1315</b>	119 lb/ft <sup>3</sup> (1.9 g/cc <sup>3</sup> )
Leachable Chloride Content <b>FSA Method</b>	200 ppm
<b>ASTM F104</b> Line Call Out	F712121B3E11K6M5
Color	Black or white







The pressure/temperature graphs shown are the most current method of determining the suitability of a gasket material in a known environment. However, chemical compatibility must also be considered.

pT diagram for thickness 1/16":

## LIQUIDS

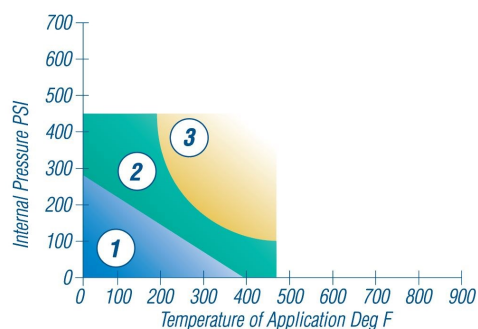

## GASES & STEAM

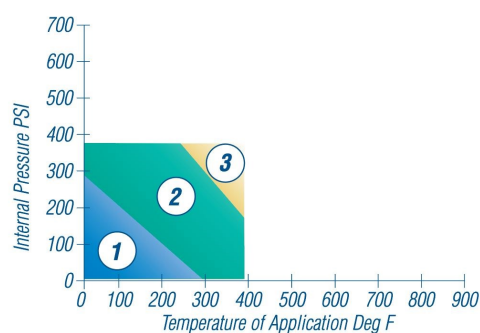

In area ① the gasket material is suitable using common installation practices subject to chemical compatibility.

In area ② appropriate measures are necessary for installation of the gasket to ensure maximum performance. Please call or refer to KLINGERexpert for assistance.

In area ③ do not install gaskets in these applications without first referring to KLINGERexpert or contacting KLINGER's technical support service.

The ability of a gasket to make and maintain a seal depends not only on the style and quality of the gasket material, but also on medium being sealed, the flange design, the amount of pressure applied to the gasket by the bolts and how the gasket is assembled onto the flanges and tightened. These factors are beyond the manufacturer's control.

